


SPECIFICATIONS


			Tailift Z1000		Tailift Z1000		Tailift Z1000		Tailift Z1000		Tailift Z1000	
			ZFD18	ZFG18	ZFD20	ZFG20	ZFG25	ZFD30	ZFG30	ZFD35	ZFG35	
CHARACTERISTICS	1	Manufacturer										
	2	Series										
	3	Model										
	4	Capacity	Q Load	kg	1800	2000	2500	3000	3500			
	5	Load center	C Distance	mm	500	500	500	500	500			
	6	Power type	Electric, Diesel, Gasoline, LPG		Diesel Gasoline	Diesel Gasoline	Diesel Gasoline	Diesel Gasoline	Diesel Gasoline			
	7	Operation type	Pedestrian, Stand, Sit	mm	Sit	Sit	Sit	Sit	Sit			
	8	Tire type	S=Solide, P=Pneumatic	front/rear	P/P	P/P	P/P	P/P	P/P			
	9	Wheels (Xdriven)	Number	front/rear	2X/ 2	2X/2	2X/2	2X/2	2X/2			
	10		h3 Lift	mm	3000	3000	3000	3000	3000			
DIMENSIONS	11	Lift at 2-stage mast	h2 Standard free lift	mm	0	0	0	0	0			
	12		h5 Optional free lift	mm	1490	1490	1490	1490	1490			
	13	Load bracket	h8 Height of load bracket	mm	1220	1220	1220	1220	1220			
	14	Fork size	Thickness(s) x Width(e) x Length(l)	mm	35x100x1070	40x122x1070	40x122x1070	45x122x1070	50x122x1070			
	15	Mast tilting angle	Forward (α) / Back (β)	deg	6° /12°	6° /12°	6° /12°	6° /12°	6° /12°			
	16		L2 Length to face of forks	mm	2390	2645	2645	2760	2910			
	17		B Total width	mm	1065	1160	1160	1270	1270			
	18	overall dimensions	h1 Mast high lowered	mm	1990	1990	1990	2000	2000			
	19		h4 Mast height extended(w/o bracket)	mm	3720	3720	3720	3720	3720			
	20		h4 Mast height extended	mm	4220	4220	4220	4220	4220			
CHASSIS	21		h6 Overhead guard height	mm	2140	2180	2180	2210	2210			
	22		h7 Seat height	mm	1150	1120	1120	1180	1180			
	23	Turning radius	R	mm	2060	2170	2200	2365	2600			
	24	Load distance	X From center of front axle	mm	440	500	500	510	510			
	25		number front/rea		2/2	2/2	2/2	2/2	2/2			
	26	Tire size	front	mm	6.50-10-10P.R.	7.00-12-12PR	7.00-12-12PR	8.15-15-12PR	8.15-15-14PR			
	27		rear	mm	5.00-8-8P.R.	6.00-9-10PR	6.00-9-10PR	6.50-10-10PR	6.50-10-10PR			
	28	Wheelbase	Y	mm	1480	1650	1650	1700	1850			
	29	Tread	Center of tires front	mm	890	1050	1050	1050	1050			
	30		Center of tires rear	mm	900	975	975	975	975			
GROUND CLEARANCE	31	Ground clearance	m1 at lowest point	mm	110	110	110	120	120			
	31		m2 center of wheelbase	mm	155	170	170	210	210			
	32	Service brake	operation/control		Hydraulic	Hydraulic	Hydraulic	Hydraulic	Hydraulic			
33	Parking brake	operation/control		Foot	Foot	Foot	Foot	Foot				

Engine

Model	ZFD18-25		ZFD20-35		ZFG18-25		ZFG20-35	
Manufacturer	Isuzu	Yanmar	Isuzu	Yanmar	Yanmar	Nissan	Nissan	
Engine Model	C240PKF-23	4TNE-94	4JG2	4TNE-94	4TNE-98	K21	K25	
Speed	rpm	2500	2200	2450	2200	2450	2250	2300
Output	kw	34.6	34.2	44.8	34.2	44.1	31.2	37.4
cylinders no./displacement	--/cc	4/2369	4/3054	4/3059	4/3054	4/3319	4/2065	4/2488



Ast=X+R-b+a  
 b=l.aenge der Ladung  
 a=Freiraum (200mm)



SMS/3W Material Handling of Mexico, Tailift.  
 TEL: +52(81)1498-3768  
 TEL: +52(61)4368-0757  
 Email: jespitia@sms-3w.com  
 Website: <https://sms-3w.com/montacargas/>




FD/FG 1.8-3.5 ton  
 IC FORKLIFT TRUCKS



Tailift offer you extra value and high quality lift truck.  
 Tailift lift truck is the best solution to your materials handling needs.  
 Tailift all new Z series is complete new design with innovation

Tailift offer you extra value and high quality lift truck.  
Tailift lift truck is the best solution to your materials handling needs.  
Tailift all new Z series is complete new design with innovation.  
Tailift will show you how the Z series sets new standard in 5 main areas : **great performance, comfort& ergonomic , easy operation and safety** for operator and real value for our customer through an impressively **low cost of ownership**, also committed to providing unparalleled **after sales service**.

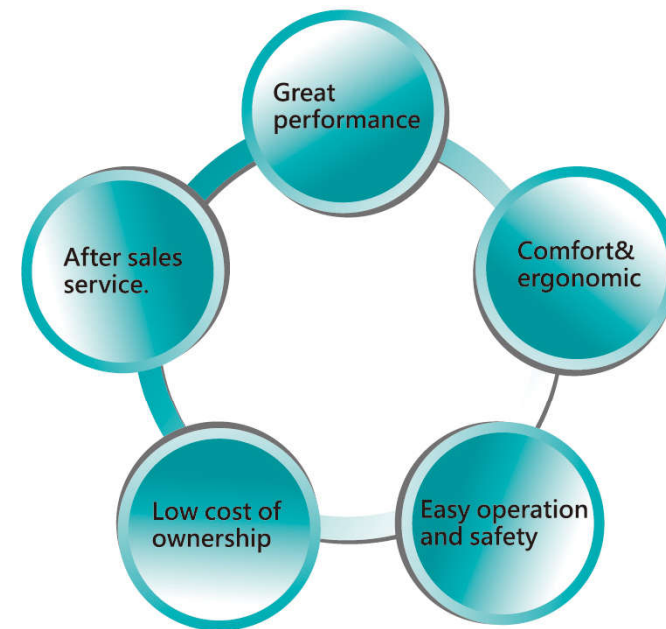




Tailift Z series forklift trucks are designed to boost performance and to increase productivity and manufactured to be the most dependable truck in today's market.



## Low noise Low vibration

### Standard with suspension transmission

The remarkable Suspended power train with a flexi-coupling to the drive axle is a big innovation which achieve low noise and vibration. The noise has been reducing to **79db**. The Z series enclosure body also prevents operation noise from escaping into the opening area.

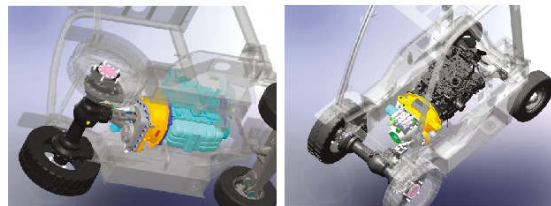

## High Performance and low fuel consumption engines

You can choice your engine to suit your particular application and conditions include Isuzu, Yanmar, Nissan engine All engines meet EU and EPA emission These industry-leading engines have been applied to provide great performance, low fuel consumption, low noise easy maintenance and low service cost.


	1800kg-2000kg	2500-3500kg
Diesel Engine	Isuzu C240 Yanmar 4TNE92	Isuzu 4JG2 Yanmar 4TNE98
Gasoline Engine	Nissan K21	Nissan K25



## How the Z series raises your productivity


### Steering

Superior turning radius and smart. The new axle provides wider steering angles to **85 degree** and reduce to a smaller turning radius. Its compact size allows the truck to work in narrower aisles.



### Lifting

The faster lifting speed will reduce your working hours and lower your operation costs

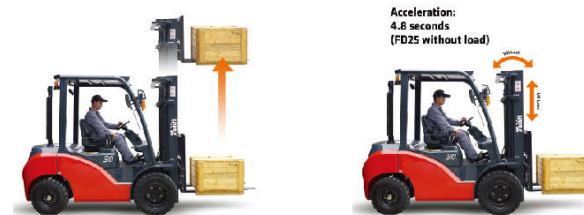


### Acceleration

15% Higher Accelerating Ability. Reducing the driving time on same travel distance, increasing productivity

### Braking

Using industrial oil-immersed disc brakes design, which has 3 times brake shoe durability and friction areas. longer running hours (4000~8000hours) without brake adjustment and reduce your maintenance cost.



### Multi-disc clutch

The multi-disc clutch design ensures high torque capacity permitting smooth direction change. The Z series transmission have 4 pieces plates and bigger clutch pack improve frictional force and reduce wear out speed.


Relief valve design to decrease oil pressure impulse. The forward and reverse solenoid valve are integral, allow quick direction change. Enlarge oil filter given better oil cleanliness.

## Surprisingly comfortable & Ergonomics (STD)

The Z series innovative ergonomic features were designed to help make operator more comfortable and, as result, more productive.

### Smaller steering wheel

easy to operate and reduce operator's arm and shoulder's workload. Diameter reduce from 350mm to 300mm. The easy-handling steering wheel column with tilt adjustment helps to provide the ideal operating position and improve performance.



### Adjustable steering wheel column

The easy-handling steering wheel column with tilt adjustment helps to provide the ideal operating position and improve performance.

### Long operator assist grips

designed to meet the needs of varying operator sizes



### Pedal type parking brake

Operator can use one foot to control parking brake without changing body position



### Multifunctional LCD instrument panel

A large and easy-to-read multifunctional LCD panel is ergonomic designed for the operator. Which is design 40 degree on the right hand angle of the operator and help operator to read.

### Internal hidden tilt cylinder

Internal hidden tilt cylinder avoids and reduces scrape possibility. Enlarge access space and given better appearance.

### Hydraulic control

The ergonomic design of levers are provide the perfect positions for operator's hand without causing any extra stress.



### Clear view and Enlarge operation space

excellent visibility and higher residual load capacity

- Standard 150mm free lift
- Low profile front cowl
- Back type roller
- Hiding hose design
- New fork carriage



Upward visibility



Forward visibility



Fork tip visibility



Rear visibility



### Enlarged space give great comfortable and Increasing productivity.

380mm wide -open foot space provides the comfortable foot activity space. It is about 30% wider than 7 series.



380mm &  
30% wider





## Surprisingly comfortable & Ergonomic (optional)

### Superior comfort cabin

New Z series is focusing on working environment and operator's comfort. The new cabin designed with no blind spot. It is a comfortable and safe work place for the operator. The Cabin's 360 degrees crystal view minimums the risk of damage to operator and goods. Wide range of optional equipments such as heater and radio in the interior lining of the overhead guard to meet all your needs. Quality components, an Insulated engine compartment, as well as the construction itself, ensure a low noise and vibration level.

### Rubber suspended cabin:

- Operator comfort
- Vibration-free
- Functional arrangement
- Low noise level
- Ergonomic operation

Optional advanced hydraulics Minlever and joystick with armrest are all new design give more comfort to the operator.



Mini Levers

Radio

Radio

### Integral sideshifter (option)

minimums truck movements for shipping and receiving loads and increase overall operator efficiency.





## Easy operation and safety

easy-operating controls and a range of available options to give operators better, more efficient control and provide higher productivity.

### Electric F/R control lever

- One-piece lever offers easy shifting between forward and reverse while keeping both hands on the wheel. It is easy to reach and fast to change direction.
- Enlarge light switch  
Integrated with turn signal levers into the slim profile steer column for easy accessibility and simple operation.
- Low profile front cowl with sloped dashboard provide an unobstructed view in any position.



### Integral heavy duty chassis

A strong no-bolt integral heavy duty chassis gives the driver 20% more protection from falling loads.




### Hydraulic lock out system

Our new hydraulic lock out system option which automatically lock off all hydraulic functions and transmission drive if it has not detected the presence of the operator.



### Low truck centre of gravity for best stability

Allow high residual capacities even at high lifts.

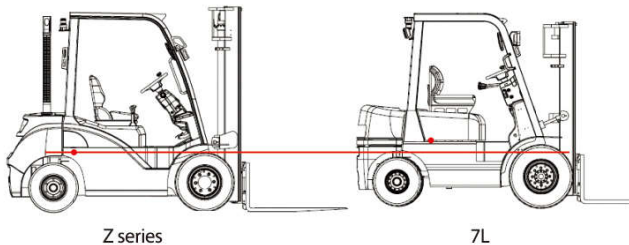

Hydraulic safety valve to absorb mast dropping speed, avoid the accident happen.

## Low cost of ownership + World Class Dependability

### + Superior Serviceability

simplify mechanical linkage to reduce drive component wear and tear. Extend brake pedal and mechanical working life.

The new Hydraulic steering axle using high and low blockage fixed way to fix shaft, Grease nipples located on the contact points extend working life time and lower maintenance cost.

## Easy maintenance + Good technical support

### Fast & simplified Serviceability

- The new hood open angle has been enlarged to 70 degree.
- Removable side-plate on side of truck enlarge maintenance space
- Radiator top Cover No tool needed to open
- using steel piping, clean and tidy fitting , durable and easy to maintain

### Experience Technical support

We offer extensive customer support and service for our entire range of material handling products – both past and present. Our experienced technicians are always on hand to help with product installation, maintenance and questions relating to Tailift material handling products.

### Spare parts-Fast delivery, Flexible service, competitive pricing

Our spare part inventory warehouse containing nearly 40,000 items with over 150,000 product applications. If ordered before 15:00 h. Eastern Time , required spare parts can be delivered to you or to our service engineer the next day. Tailift utilizes our years of experience, fast delivery, flexible service and competitive pricing to make the maintenance of your forklift as cost-effective and painless as possible.

